



**Decorative Base Cover:**



**Baseplate:**

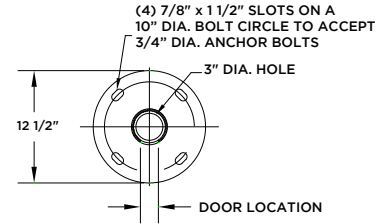

**Specifications:**

**Pole Shaft:**

Shallow Fluted Extruded (SFE) non-tapered aluminum shaft.



**Shallow Fluted Extruded (SFE)**

**Decorative Base Cover:**

Two piece cast aluminum base cover with maximum shaft opening of 6.3125".

**Base Weight\*:**

8 lbs

\*Consult Shaft Detail Chart below for pole shaft weight


**Finish:**

Available in textured or smooth.

**Options:**

GFI > Ground Fault Receptacle

**How to Order:**

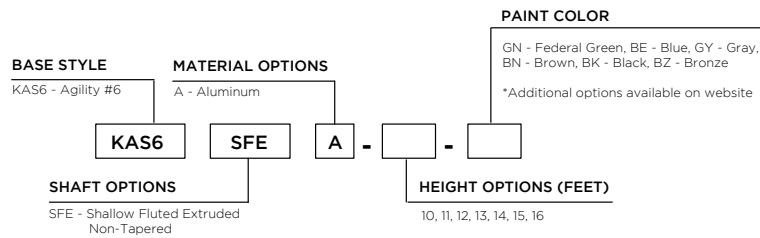

SFE ALUMINUM // Shaft Details

Catalog Number	Ht. (ft)	Butt (in)	Tip (in)	Tenon	Wall Thickness (in)	Wt. (lbs)	90 MPH		100 MPH		110 MPH		120 MPH		150 MPH		Anchor Bolt Dia. (in)
							Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)			
KAS6SFE-A-10	10	5	5	3.5" x 3.5"	0.125	22	6.2	500	4.9	500	3.8	500	3.0	500	1.5	500	0.75
KAS6SFE-A-11	11	5	5	3.5" x 3.5"	0.125	25	5.1	500	4.0	500	3.1	500	2.4	500	1.1	500	0.75
KAS6SFE-A-12	12	5	5	3.5" x 3.5"	0.125	27	4.1	500	3.2	500	2.4	500	1.8	500	0.7	500	0.75
KAS6SFE-A-13	13	5	5	3.5" x 3.5"	0.125	29	3.2	500	2.5	500	1.8	500	1.3	500	-	-	0.75
KAS6SFE-A-14	14	5	5	3.5" x 3.5"	0.125	31	2.5	500	1.9	500	1.3	500	0.8	500	-	-	0.75
KAS6SFE-A-15	15	5	5	3.5" x 3.5"	0.125	33	1.8	500	1.3	500	0.8	500	-	-	-	-	0.75
KAS6SFE-A-16	16	5	5	3.5" x 3.5"	0.125	36	1.1	500	0.8	500	-	-	-	-	-	-	0.75

1-27-2020