


THE BEAUMONT

Available with three distinct base style options, the clean lines of the Beaumont family of poles make it an ideal choice for a customer looking for the classic style of a round pole, but with the added flare of a decorative base. The Beaumont offers a slender tapered round shaft with a complementing stepped round base for additional accent. The KB8 style features a second step for a custom appearance.

At shorter lengths, the Beaumont is ideal for residential applications and park settings, while the KB3 with up to a 40' mounting height is an ideal fit for roadway and arterial lighting applications.

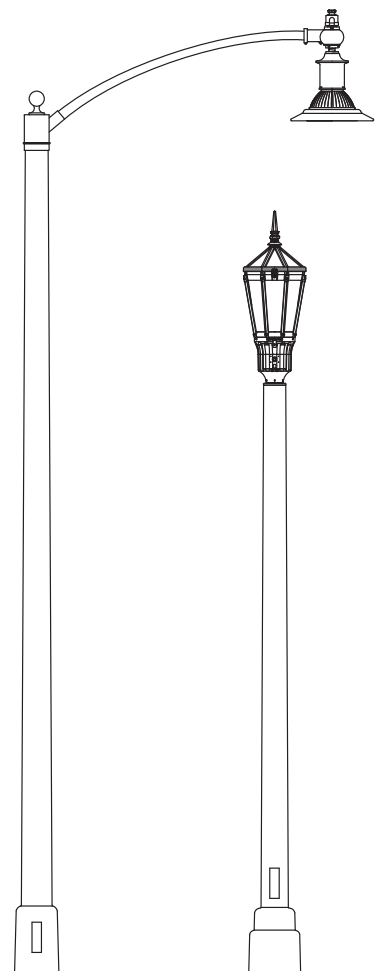

Specification Details - Beaumont B2

Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate
Beaumont B2	KB2-15	15' 0"	6 3/8"	4' 6" x 7 7/8"	970 lbs	750 lbs
Beaumont B2	KB2-18	18' 0"	6"	5' 0" x 7 7/8"	1070 lbs	830 lbs
Beaumont B2	KB2-20	20' 0"	5 3/4"	5' 0" x 7 7/8"	1140 lbs	900 lbs
Beaumont B2	KB2-25	25' 0"	5 1/8"	5' 0" x 7 7/8"	1290 lbs	1050 lbs
Beaumont B2	KB2-26.5	26' 6"	5"	5' 0" x 7 7/8"	1340 lbs	1100 lbs

How to Catalog for Beaumont KB2 Concrete Pole

Pole Style	Finish	Footing Details	Coating
KB2	E – Etched Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KB2 15'	E 40	DB 140 30/30	GFI NA
Height 15' - 26'6"	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders


* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details



Direct Buried

(Simple and Cost Effective)



1. Auger the setting hole.
2. Set pole in hole and plumb straight.
3. Backfill* with required backfill tamping every 4" to 6".

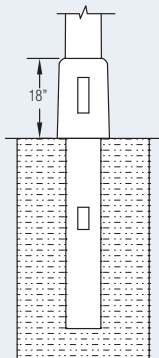



Baseplate Option 1: FBP



Baseplate Option 2: SBP



*Generally the excavated material can be used for backfill, in some situations better backfill may be required.

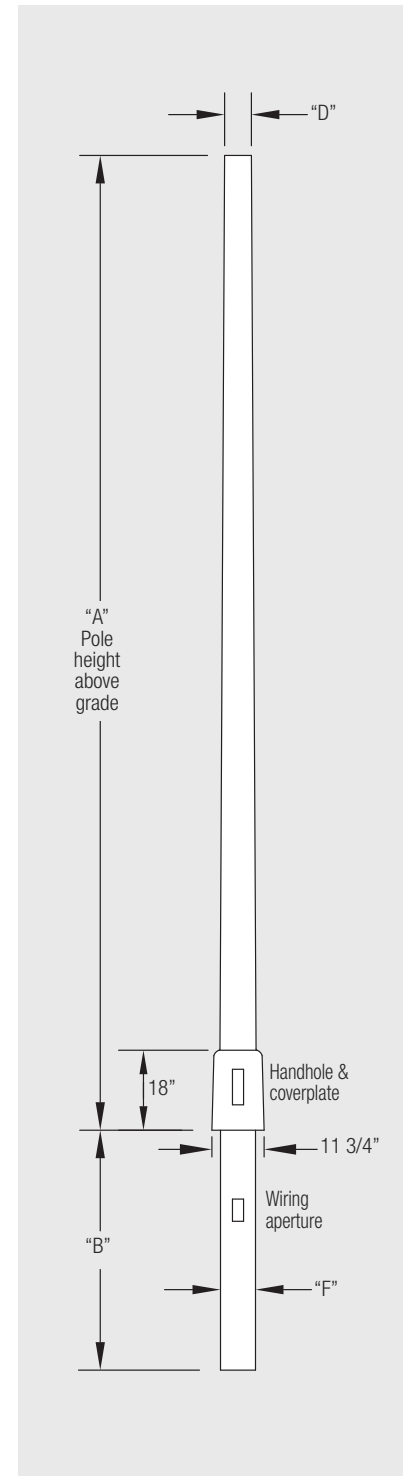

Typical Pole Cross Section


Specification Details - Beaumont B3 and B7

Description	Catalog Number	"A" Pole Height Above Grade	"B" Base Dimension	"D" Tip Dimension	"H" Base Height	"P" Base Plate Size	"BCD" Bolt Circle Dia.	Pole Weight Base Plate
Beaumont B7	KB7-10	10' 0"	11 7/8"	6 1/4"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	550 lbs
Beaumont B7	KB7-12	12' 0"	11 7/8"	6"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	610 lbs
Beaumont B7	KB7-15	15' 0"	11 7/8"	5 5/8"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	700 lbs
Beaumont B7	KB7-20	20' 0"	11 7/8"	5"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	820 lbs
Beaumont B7	KB7-24	24' 0"	11 7/8"	4 1/2"	17 1/8"	3/4" x 12 1/2"	14 1/2" Dia	930 lbs
Beaumont B3	KB3-25	25' 0"	17 7/8"	6 7/8"	27"	1 1/4" x 20"	21" Dia	1520 lbs
Beaumont B3	KB3-30	30' 0"	17 7/8"	6 1/4"	27"	1 1/4" x 20"	21" Dia	1720 lbs
Beaumont B3	KB3-35	35' 0"	17 7/8"	5 3/4"	27"	1 1/4" x 20"	21" Dia	1950 lbs
Beaumont B3	KB3-40	40' 0"	17 7/8"	5 1/8"	27"	1 1/4" x 20"	21" Dia	2100 lbs

How to Catalog for Beaumont KB3 and KB7 Concrete Pole

Pole Style	Finish	Footing Details	Coating
KB7 KB3	E - Etched Finish	FBP - Flush Baseplate	NA - Non Acrylic A - Acrylic AG - Anti Graffiti Coating***
KB3 40'	E 40	FBP 140 30/30	GFI NA
Height KB7 - 10' - 24' KB3 - 25' - 40'	Color** 10 - Midnight Lace 11 - Eclipse Black 30 - Salt & Pepper 40 - Pearl Gray 90 - Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR - Duplex Receptacle GFI - Ground Fault Duplex Receptacle SR - 1 Outlet LRN - Ladder Rest BPC - Base Plate Cover AB - Anchor Bolts BA - Banner Arms FH - Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

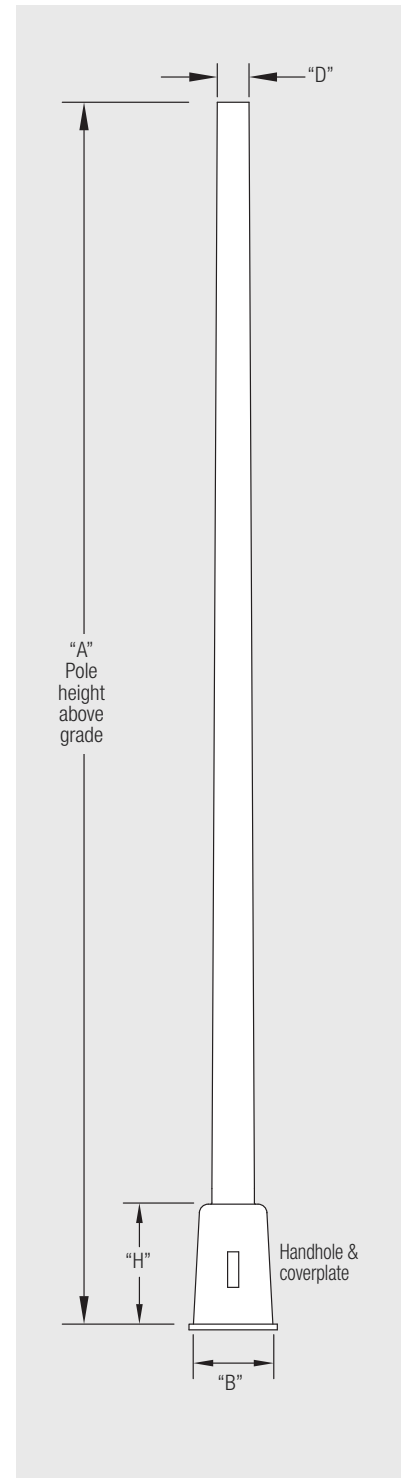

Footing Details

Baseplate Option 1: FBP

Typically pole is set 2" - 3" below grade to hide anchor bolts

Galvanized Anchor Bolts (55,000 PSI min. yield)
KB7 - 10-24 - 3/4" x 24"
KB3 - 25-40 - 1" x 36"

Foundation by others

Slots on a "BCD" dia. slot size
KB7 - 7/8" x 1-1/2"
KB3 - 1-1/4" x 1-1/2"

Wire Access Hole

Hot dipped galvanized baseplate x "FBP" sq
KB7 - 10-24 - 3/4" thick
KB3 - 25-40 - 1-1/4" thick

Typical Pole Cross Section

Specification Details - Beaumont B8

Description	Catalog Number	"A" Pole Height Above Grade	Base Diameter	"D" Tip Dimension	Base Height	Pole Weight Base Plate
Beaumont B8	KB8-10	10' 0"	13 3/4"	6 1/4"	17 5/8"	580 lbs
Beaumont B8	KB8-12	12' 0"	13 3/4"	6"	17 5/8"	640 lbs
Beaumont B8	KB8-15	15' 0"	13 3/4"	5 5/8"	17 5/8"	730 lbs
Beaumont B8	KB8-20	20' 0"	13 3/4"	5"	17 5/8"	830 lbs
Beaumont B8	KB8-24	24' 0"	13 3/4"	4 1/2"	17 5/8"	960 lbs

How to Catalog for Beaumont KB8 Concrete Pole

Pole Style	Finish	Footing Details	Coating
KB8	E – Etched Finish	FBP – Flush Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KB8	E	FBP	NA
10'	40	140 30/30	GFI
Height	Color**	Tenon (Post Top Mount)	Options*
10' - 24'	10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decolor on page 2 for full selection of colors.
***Anti Graffiti Coating is extra, consult factory for more details.

Footing Details

Baseplate Option 1: FBP

Typically pole is set 2" - 3" below grade to hide anchor bolts

Galvanized Anchor Bolts (55,000 PSI min. yield) KB8 - 1" x 36"

Foundation by others

1-1/4" x 1-1/2" Slots on a 17" Diameter Bolt Circle

Wire Access Hole

Hot dipped galvanized baseplate 1" x 16" sq

16" sq

17 5/8"

