


THE SHERIDAN

Probably the most widely used of all ornamental spun concrete poles, the Sheridan typifies the lighting style of the 20's and 30's. Its very substantial mass is cleverly disguised by the grace and simplicity of design which ensures its timeless appeal. Today the Sheridan is available in a host of warm earth-tone colors, complemented by our standard etched textural finish, in mounting heights of 10' to 25'.

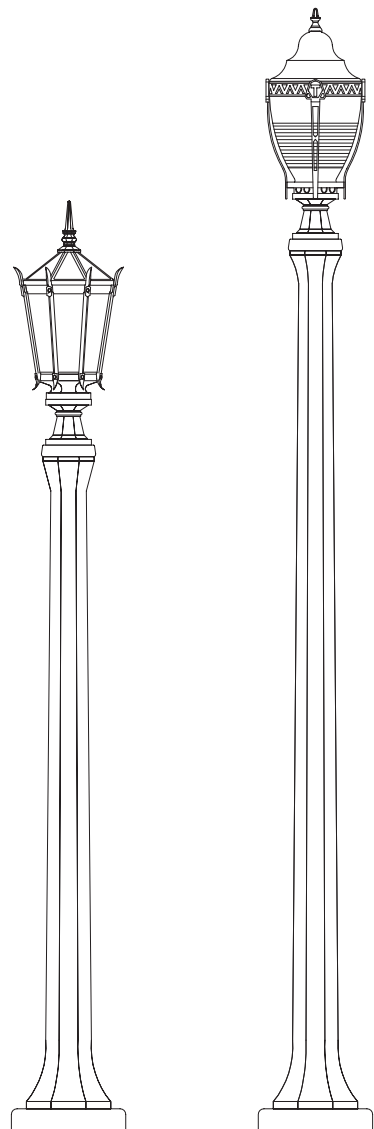

Specification Details*


Description	Catalog Number	"A" Pole Height Above Grade	"D" Tip Dimension	"B" Direct Burial Length & "F" Dia.	Pole Weight Direct Burial	Pole Weight Base Plate	
Sheridan Flared Top	10'	KS10-F	10' 0"	9"	4' 6" x 10"	840 lbs	600 lbs
Sheridan Non Flared Top	10'	KS10-NF	10' 0"	6 3/8"	4' 6" x 10"	835 lbs	595 lbs
Sheridan Non Flared Top	12'	KS12-NF	12' 0"	6"	4' 6" x 10"	885 lbs	715 lbs
Sheridan Flared Top	13'	KS13-F	13' 0"	9"	4' 6" x 10"	925 lbs	685 lbs
Sheridan Non Flared Top	13'	KS13-NF	13' 0"	5 3/4"	4' 6" x 10"	920 lbs	680 lbs
Sheridan Non Flared Top	14'	KS14-NF	14' 0"	5 1/2"	4' 6" x 10"	918 lbs	730 lbs
Sheridan Flared Top	15'	KS15-F	15' 0"	9"	4' 6" x 10"	985 lbs	745 lbs
Sheridan Highwayman**	15'	KSH15	15' 0"	6 1/2"	4' 6" x 9 3/4"	1400 lbs	1150 lbs
Sheridan Highwayman**	18'	KSH18	18' 0"	6 1/8"	5' 0" x 9 3/4"	1570 lbs	1270 lbs
Sheridan Highwayman**	20'	KSH20	20' 0"	5 7/8"	5' 0" x 9 3/4"	1680 lbs	1380 lbs
Sheridan Highwayman**	22'	KSH22	22' 0"	5 3/4"	5' 0" x 9 3/4"	1750 lbs	1450 lbs
Sheridan Highwayman**	25'	KSH25	25' 0"	5 3/8"	5' 0" x 9 3/4"	1900 lbs	1600 lbs

* For bollard catalog information please see the bollard section in the King Luminaire catalog or visit our website at www.StressCreteGroup.com
 ** All Sheridan Highwayman have Non Flared Tops.

How to Catalog for Sheridan Concrete Pole

Pole Style	Finish	Footing Details	Coating
KS KSH	E – Etched Finish S – Polished Finish	DB – Direct Buried FBP – Flush Baseplate SBP – Stub Baseplate	NA – Non Acrylic A – Acrylic AG – Anti Graffiti Coating***
KS 15'	E 40	DB 140 30/30	GFI NA
Height 10' - 25'	Color** 10 – Midnight Lace 11 – Eclipse Black 30 – Salt & Pepper 40 – Pearl Gray 90 – Saluki bronze	Tenon (Post Top Mount) Specify Tenon Size For example 140 30/30 = 2 7/8" OD & 3" long	Options* DR – Duplex Receptacle GFI – Ground Fault Duplex Receptacle SR – 1 Outlet LRN – Ladder Rest BPC – Base Plate Cover AB – Anchor Bolts BA – Banner Arms FH – Flag Holders

* Consult website for full listings. ** See decor colors on page 2 for full selection of colors.
 ***Anti Graffiti Coating is extra, consult factory for more details.

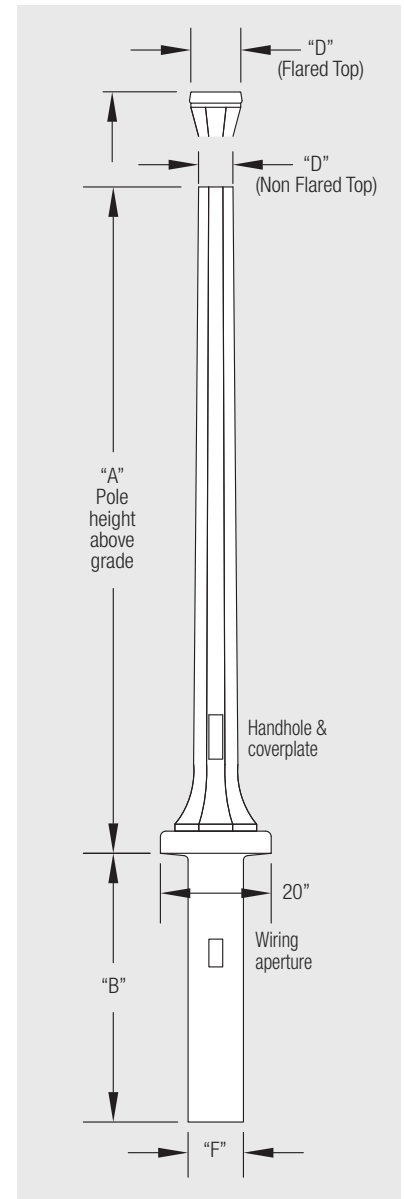

Footing Details

Direct Buried
 (Simple and Cost Effective)
 1. Auger the setting hole.
 2. Set pole in hole and plumb straight.
 3. Backfill* with required backfill tamping every 4" to 6".

Baseplate Option 1: FBP

Hot Dipped galvanized baseplate 20" x 20" x 3/4"
 Wire Access Hole
 (4) 7/8" x 1-3/4" L Slots on a 23-3/8" Diameter Bolt Circle

Typically pole is set 2" - 3" below grade to hide anchor bolts
 Anchor Rod (55,000 PSI min. yield) 3/4" x 27" x 3-3/4" bend minimum
 Foundation by others

Baseplate Option 2: SBP

1-1/4" x 1-1/2" L slots on a 14-1/2" B.C.
 Wire Access Hole

Concrete extension for baseplate mounting
 Anchor Rod (55,000 PSI min. yield) 3/4" x 27" x 3-3/4" bend minimum

* Generally the excavated material can be used for backfill, in some situations better backfill may be required.

