



K366 HARBOR SIDE - LED

Designed to add style and function to marinas, pathways, and waterfronts, the K366 Harbor Side, offers rugged aesthetics and a high quality, well-engineered luminaire. Available in both post top and pendant formats to coordinate pathways, and roadways alike.



**King
Luminaire**

PRODUCT SPECIFICATIONS

P4 LED ENGINE

Light engine shall include an array of Cree X-Series high power LEDs (light emitting diodes). The emitters shall be mounted to a metal core circuit board using SMT technology. The LEDs and circuit boards shall then be mounted to a high performance heat sink. External light control shall consist of high precision refractive lenses mounted above the LED emitter arrays in such a way to achieve optimum uplight control. The lenses shall also control horizontal light distribution so that either Type II, III, IV, or V IESNA distribution patterns are achieved.

LENS

The K366 Harbor Side shall have an acrylic lens with a minimum body thickness of 0.25". The lens shall be secured by means of a cast aluminum holding ring. The lens shall be sealed by means of a continuous neoprene gasket applied to the lens frame to provide an IP66 ingress protection rating.

LUMINAIRE CONSTRUCTION

The luminaire shall consist of a heavy cast aluminum housing that acts as the enclosure for the engine and shall be of adequate thickness to give structural rigidity. The engine shall be affixed to the inside of the housing with stainless steel screws.

PLUMBIZER

The K366 Harbor Side shall come with multiple mounting options including the KPL10, KPL11, KPL20, KPL21, KPL30, KPL31, and KPL40. Please contact King Luminaire for more details and specifications.

DRIVER

The LED universal dimmable driver shall be DALI-2 D4i and capable of 108 - 305V or 249 - 528V input voltage, greater than 0.9 power factor, and less than 20% total harmonic distortion. Each LED system shall come with built-in, high-capacity surge protection, in addition to a complementary SPD added by King Luminaire, designed to withstand up to 20kV/10kA of transient line surge as per IEEE C62.41.2 C High

and ANSI C136.2 Extreme Level (20kV/10kA). An in-line ferrite choke shall be utilized to provide protection against EFT's. The driver assembly shall work with service feeds powered with one hot wire and a neutral or two hot wires. The case temperature of the driver shall range from -40°C up to 70°C. The driver assembly shall be mounted on a heavy duty fabricated aluminum mounting bracket.

PHOTOMETRICS

Fixtures shall be tested to IESNA LM79 specifications. These reports are to be available upon request.

CHROMATICITY

High output LEDs shall come standard at 2700K, 3000K, & 4000K (+/- 300K) with a minimum nominal 70 CRI. Additional CCT emitters are to be available upon request.

LUMEN MAINTENANCE

Reported (TM21) and Calculated (L70) reports are to be available upon request with a minimum calculated value of 100,000 hrs.

WIRING

All internal wiring and connections shall be completed so that it will be necessary only to attach the incoming supply connectors to Mate-N-Lok connectors or to a terminal block. Mate-N-Lok shall be certified for 600V operation. Internal wire connectors shall be crimp connector only and rated at 1000V and 105°C. All wiring to be CSA certified and/or UL listed, type SFF-2, SEWF-2, or SEW-2 No. 14 gauge, 105°C, 600V.

THERMALS

Fixtures shall be tested by a DOE sanctioned test facility to determine the maximum in-situ solder-point or junction-point temperatures of the LED emitters. This report is to be available upon request.

FINISH

Housing shall be finished with a 13 step KingCoat™ SuperDurable polyester TGIC powder coat. Standard colors shall include strobe white, brown metal, marina


blue, gate gray, Chicago bronze, standard gold, standard black, federal green, and rain forest. Please see our website for a complete list of colors. Additional RAL or custom color matches are to be available.

MISCELLANEOUS

All exterior hardware and fasteners, wholly or partly exposed, shall be stainless steel alloy. All internal fasteners shall be stainless steel or zinc coated steel. All remaining internal hardware shall be stainless steel, aluminum alloy, or zinc coated steel.

WARRANTY

The K366 Harbor Side LED luminaire shall come with a 7 year limited warranty.



CERTIFICATION:

CSA US Listed
Suitable for wet locations
ISO 9001
IP66
ARRA Compliant
LM79 / LM80 Compliant

DRIVER INFO:

>0.9 Power Factor
<20% Total Harmonic Distortion
120V - 277V or 347 - 480V
-40°C Min. Case Temperature
60°C Max. Case Temp. (T1)
70°C Max. Case Temp. (P4)
Surge Protection: ANSI 136.2 extreme level 20kV/10kA
Dimming Capable

EPA:

1.13 sq. ft.

FIXTURE WEIGHT:

49 lbs




Contact King Luminaire for product specifications that are exempt from CSA Certification 09-25-2025


FIXTURE OPTIONS

K366 HARBOR SIDE - LED

Fixture Formats

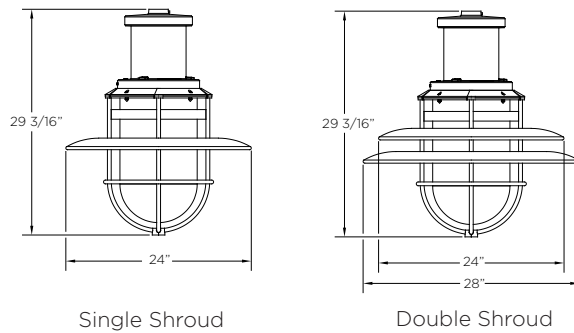

PLUMBIZER/MOUNTING OPTIONS

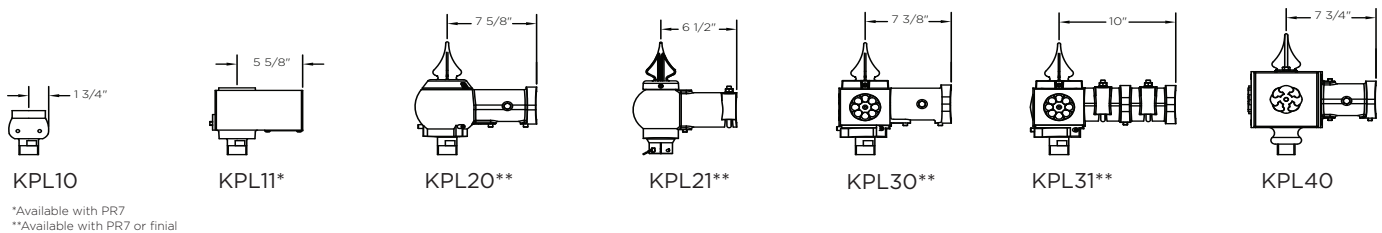

HOW TO ORDER

