



POLE SPECIFICATIONS

MATERIAL:
Square Non-Tapered Aluminum

ALLOY:
6061-T6

POLE HEIGHT:
10' - 16'

FINISH:
Available in textured or smooth.


OPTIONS:
GFI - Ground Fault Receptacle
BA - Banner Arms
FPH - Flower Pot Holder
FH - Flag Holder

CROSS SECTION:




Square Non-Tapered (SQE)

DECORATIVE BASE DETAILS





BASEPLATE DETAILS

Baseplate		Bolt Circle		Anchor Bolts	
Square (in)	Thickness (in)	Dia (in)	+/- (in)	Dia x Length x Hook (in)	Projection (in)
10	0.5	10	0	0.75 x 27 x 3.75	3

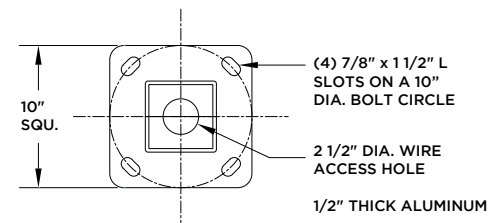

HOW TO ORDER

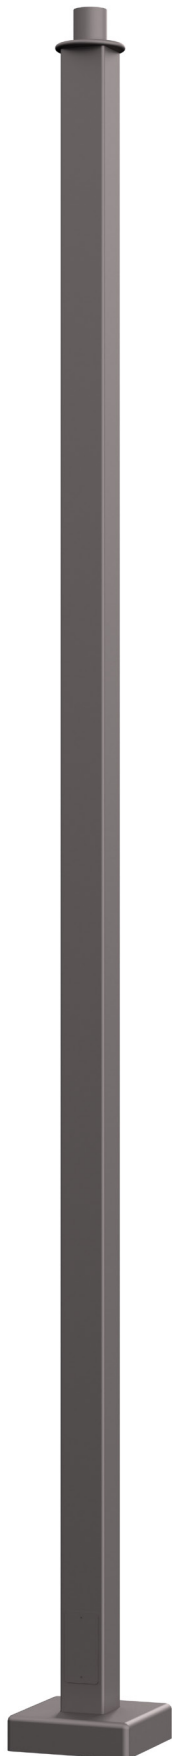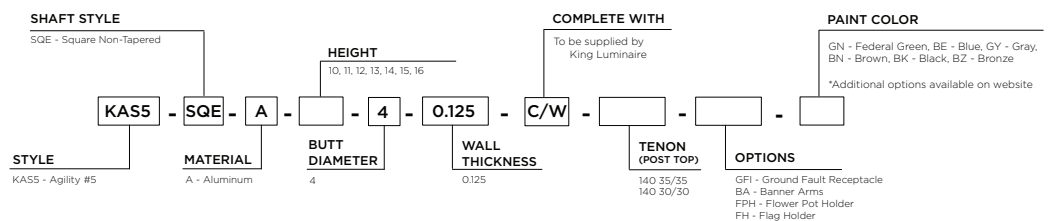

POLE DETAILS

KAS5 AGILITY #5

SQE ALUMINIUM // Pole Details

Nominal Mounting Height (ft)	Catalog Code	Alloy	Butt (in)	Tip (in)	Wall Thickness (in)	Handhole	Wt. (lbs) *
10	KAS5-SQE-A-10-4-0.125	6061-T6	4	4	0.125	2" x 4" (8-1/2" AG)	30.0
11	KAS5-SQE-A-11-4-0.125	6061-T6	4	4	0.125	2" x 4" (8-1/2" AG)	32.0
12	KAS5-SQE-A-12-4-0.125	6061-T6	4	4	0.125	2" x 4" (8-1/2" AG)	34.0
13	KAS5-SQE-A-13-4-0.125	6061-T6	4	4	0.125	2" x 4" (8-1/2" AG)	37.0
14	KAS5-SQE-A-14-4-0.125	6061-T6	4	4	0.125	2" x 4" (8-1/2" AG)	39.0
15	KAS5-SQE-A-15-4-0.125	6061-T6	4	4	0.125	2" x 4" (8-1/2" AG)	41.0
16	KAS5-SQE-A-16-4-0.125	6061-T6	4	4	0.125	2" x 4" (8-1/2" AG)	44.0

* Weight includes the pole shaft, baseplate, and decorative cover.

SHAFT LOADING

SQE ALUMINIUM // Loading

Nominal Mounting Height (ft)	Catalog Code	Design Information // AASHTO LTS-6, Latest Revision **									
		90 MPH		100 MPH		110 MPH		120 MPH		150 MPH	
		Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)	Max EPA (sq ft)	Max Load (lbs)
10	KAS5-SQE-A-10-4-0.125	5.0	200	3.6	200	2.5	200	1.7	200	-	-
11	KAS5-SQE-A-11-4-0.125	4.0	200	2.7	200	1.7	200	1.0	200	-	-
12	KAS5-SQE-A-12-4-0.125	3.1	200	1.9	200	1.0	200	-	-	-	-
13	KAS5-SQE-A-13-4-0.125	2.3	200	1.2	200	-	-	-	-	-	-
14	KAS5-SQE-A-14-4-0.125	1.5	200	0.5	200	-	-	-	-	-	-
15	KAS5-SQE-A-15-4-0.125	0.9	200	-	-	-	-	-	-	-	-
16	KAS5-SQE-A-16-4-0.125	-	-	-	-	-	-	-	-	-	-

** EPA represents the Effective Projected Area of the attachments on the pole. Designs are limited to post top luminaires or attachments located at or below the mounting height. Consult factory for poles supporting attachments located above the mounting height.

05-19-2022